


25X1C4a

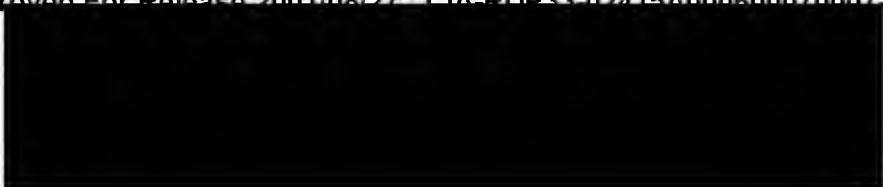

STANDARD OPERATING PROCEDURE
NUMBER 50-3105-3

3 JUNE 1974

WEATHER MINIMA

SOP

25X1A2g

1. PURPOSE: To establish weather minima and reporting procedures for the [REDACTED]

25X1A2g

2. SCOPE: This SOP applies to aircrews flying in the [REDACTED] and AWS.

3. MINIMA:

25X1A2g

a. VFR Minims: The minimums for VFR flights in the [REDACTED] are 1,500 foot ceiling and 3 mile visibility. Helicopter flights will be conducted in accordance with the minimums described in AFM 60-16.

b. Special VFR Minims: The minimums for Special VFR operations in the Control Zone are 1,000 foot ceiling and 2 mile visibility. Aircrews must request Special VFR flights before the Control Tower can approve.

25X1A2g

c. IFR Minims: The minimums for IFR flights in the [REDACTED] are 600 foot ceiling and 1 mile visibility.

25X1A2g

[REDACTED] will be considered to be below landing/takeoff minimums when the ceiling is less than IFR minima.

25X1A2g

4. PROCEDURES: The Duty Forecaster will notify the Control Tower and Operations Officer whenever weather conditions are observed or forecast to be below the VFR minima during periods of flying in the [REDACTED]. The Control Tower will relay this information to all aircraft flying in the [REDACTED].

25X1A2g

When AWS manning permits, runway visibility observations will be made; otherwise, prevailing visibility will be used.

SUPERSEDES: SOP 50-3105-3, 1 MAY 70

OPR: Operations

DISTRIBUTION: A & B

REGISTRY DISTRIBUTION					
OFFICE	ACT	INFO	OFFICE	ACT	INFO
D/SA			PD		
EXO			BFD		
D/OPS		✓	D/M		
SAS			CMD		
IDEA		✓	END		
WX	✓	✓	ETC		✓
INTEL		✓	DET-D		
CC			DET-G		
COMMO			DET-H		
SS			BANJO		
TB					



25X1A9a

APPROVED:



SUPERSEDES: SOP 50-3105-3, 1 MAY 70

ATTACHMENT 1

INSTRUMENT APPROACH MINIMUMS

VORTAC RWY 32

CATEGORY	A	B	C	D	E
S-TAC-32	5000/50	537	(600-1)	5000/60	537 (600-1½)
CIRCLING *	5300-1	837 (900-1)	5300-1½ 837 (900-1½)	5500-2 1037 (1100-2)	6100-2 1637 (1700-2)

VOR-A

CATEGORY	A	B	C	D
CIRCLING *	5300-1½	837 (900-1½)		5500-2 1037 (1100-2)

NDB RWY 32

CATEGORY	A	B	C	D
S-32	5300/50 837 (900-1)	NOT AUTHORIZED		
CIRCLING *	5300-1 837 (900-1)	NOT AUTHORIZED		

SID MINIMUMS

TACAN Saturn North/South	600 - 1
Saturn VOR/NDB	900 - 1
TACAN Crator North/South	600 - 1
Saturn VOR	900 - 1 1/2

ATTACHMENT 1 TO SOP 50-3105-3